

Svc Size: N/A

Svc Length: N/A

Svc Size: #350 UG TPX

Svc Length: 180

SITE SPECIFIC NOTES

REMOVE (3) EXISTING 6-POS. SEC. CONNECTORS INSTALL (3) NEW 8-POS. SEC. CONNECTORS (MID# 4842002)

CUSTOMER TO PROVIDE 3' X 3' WORK PIT

INSTALL (1) 17" X 30" FG HH PER STD. 6050.2000

INSTALL (3) 6-POS. FARGOS

V1 - HH1

INSTALL (1) RUN OF 350 KCMIL UG SEC. CABLE IN CUSTOMER PROVIDED 3" CONDUIT, L=180'

AT S1

INSTALL (1) 3" STUB OUT

INSTALL (1) RUN 4/0 UG TPX, L=10

INSTALL (1) 3" STUB OUT

INSTALL (1) RUN 4/0 UG TPX, L=10

AT S3

INSTALL (1) 3" STUB OUT

INSTALL (1) RUN 4/0 UG TPX, L=10'


INSTALL (1) 3" STUB OUT

MTR BASE DETAIL

SCALE: NONE

INSTALL (1) RUN 4/0 UG TPX, L=10'


CUSTOMER TO PROVIDE 3/8" NYLON PULL ROPE IN CONDUIT

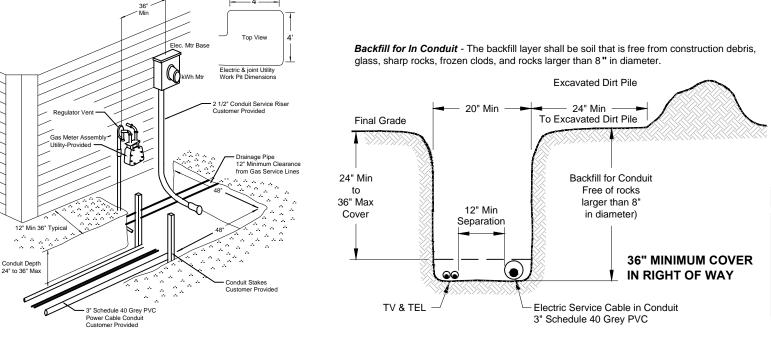

JOINT TRENCH DETAIL Electric Service Cable in Conduit (NTS)

POWER GENERAL NOTES - RESIDENTIAL PROJECT

- 1. All materials to be installed in accordance with Puget Sound Energy's (PSE) standards. Any deviation from this work sketch must be AUTHORIZED by Potelco's Project Manager and NOTED on the Foremans' Copy.
- 2. All switching arrangements and/or outage arrangements are to be made with the Project Manager at least three (3) working days in advance.
- 3. Contact the Utilities Underground Location Center (1-800-424-5555) at least 48 hours prior to commencing work to get the underground facilities located.
- 4. STAKING: The customer will provide all staking (transformer, handhole, trench, grade, lot, pole, sidewalk, etc.). See sketch and details for locations. Equipment locations must be approved by the Project Manager.
- 5. SITE PREPARATION: The work area will be at or near finished grade, clear of trench spoils or construction materials which would restrict construction and/or equipment access, before work can begin.
- 6. CLEARANCES: Transformers require a minimum of 6 feet from fire fighting equipment, 10 feet from combustible walls, overhangs, doors, and windows, and a minimum of 5 feet from the back of curb (or quard posts will be required per PSE standards). All conduits and vaults are to be at least 5 feet away from water, storm and sewer lines when paralleling them in the right of way, and at least 1 foot when crossing them.
- 7. All work is to be done in accordance with local municipal and county permit requirements as applicable
- 8. Inclement weather conditions may cause delays in construction times and dates.
- 9. EXCAVATION: The customer is to provide all trenching, backfill, vault excavations, compaction and restoration per this sketch and per PSE standards. A minimum protective cover of 36" is required over PSE's primary voltage equipment and 24" is required of PSE's secondary voltage equipment. The customer will provide any and all shoring or they will side slope the trench to 1:1.

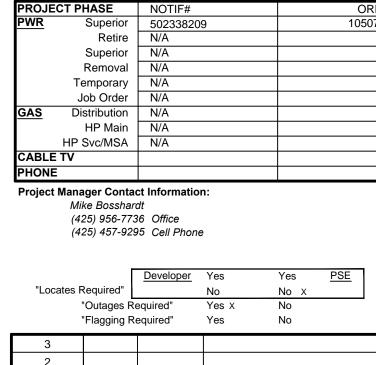

REV# DATE BY DESCRIPTION

N/A

OH CKT MAP

2605E132

OP MAP

KING

-26. R-05. SEC 33 NW

J-MAP NO (POWER)

DESIGNED BY PSE

UTILITIES

PHONE#

CONTAC

/4 SEC

FOREMAN (CHECK BOX WHEN COMPLETED)

PSE Equipment LOCKED/SECURED & Work Area left in CLEAN/SAFE Condition

Grid, Cable, and Switch numbers INSTALLED & VERIFIED. Field Changes RED-LINED on As-built.

Material VERIFIED and CHANGES noted on Paperwork.

Total PRIMARY Cable noted on As-built.

Correct QC Checklist(s) reviewed


Foreman's Signature

Print Name _

Deviations noted on the As-built and their reason.

and that all quality requirements are met.

Company ID#'s RECORDED in correct location on As-built.
Indicate correct FUSE SIZE on As-built & VERIFY proper PHASE.

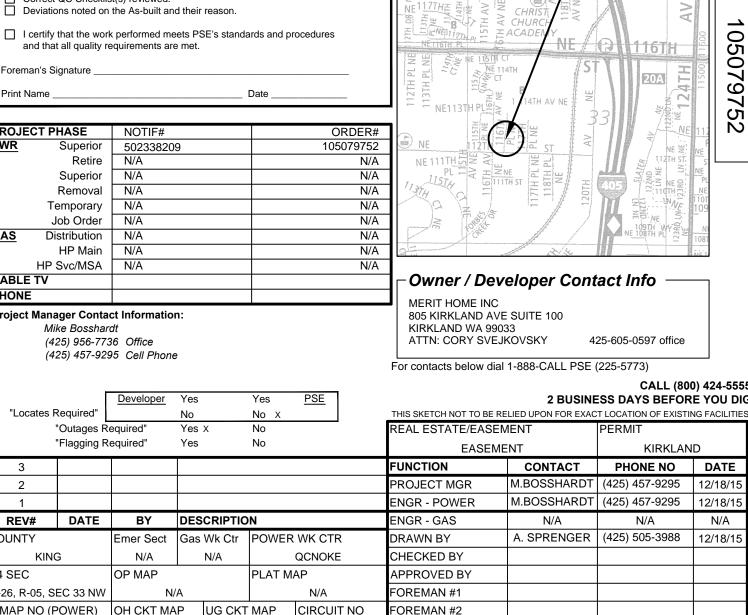

— WORK SITE


N/A

N/A

N/A

Vicinity Map

TB PG 506 F-7

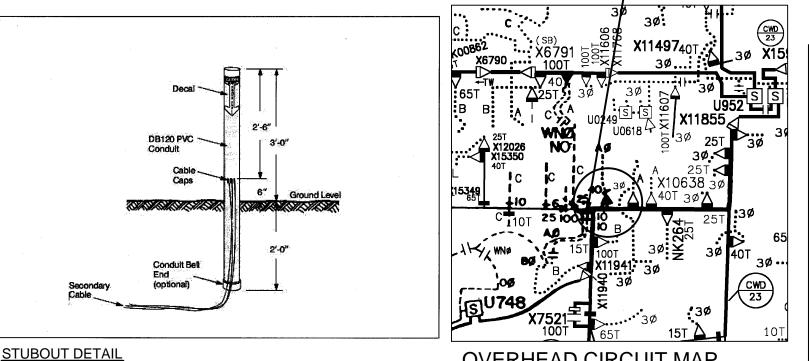

OVERHEAD CIRCUIT MAP SCALE: NONE

SOUND **ENERGY**

N/A

N/A

N/A

N/A

PLAT MAP

PRI LINE EXTENSION 11616 NE 112TH ST KIRKLAND WA 98033

JOINT FACILITIES ARRANGEMENTS

N/A

N/A

INCIDENT N/A MERIT HOMES INC N/A Gas Order Elect Order 105079752 N/A PAGE SCALE AS NOTED

N/A

N/A

N/A